



enviro[®] ET SERIES PRO

110V / 230V - UK/EU/USA plug version




| Model no. | Performance | | | Power consumption (w) | Connector Size (mm) | Dimensions (mm) (LxWxH) |
|-----------|--------------|---|----------------|-----------------------|---------------------|-------------------------|
| | Flow (l/min) | | Pressure (bar) | | | |
| ET30 | 30 | @ | 0.12 | 25 | 14 | 208x150x178 |
| ET40 | 40 | @ | 0.12 | 30 | 14 | 218x156x182 |
| ET60 | 60 | @ | 0.12 | 55 | 18 | 203x165x153 |
| ET80 | 80 | @ | 0.10 | 85 | 18 | 210x185x171 |
| ET100 | 100 | @ | 0.10 | 105 | 18 | 238x196x177 |
| ET120 | 120 | @ | 0.10 | 125 | 18 | 265x215x198 |
| ET150 | 150 | @ | 0.20 | 130 | 18 | 256x200x222 |
| ET200 | 200 | @ | 0.20 | 195 | 18 | 256x200x222 |


- ✓ Robust and compact construction - weatherproof.
- ✓ Green drive technology - energy efficient motors low power consumption.
- ✓ Supplied with rubber elbow for easy fitting.

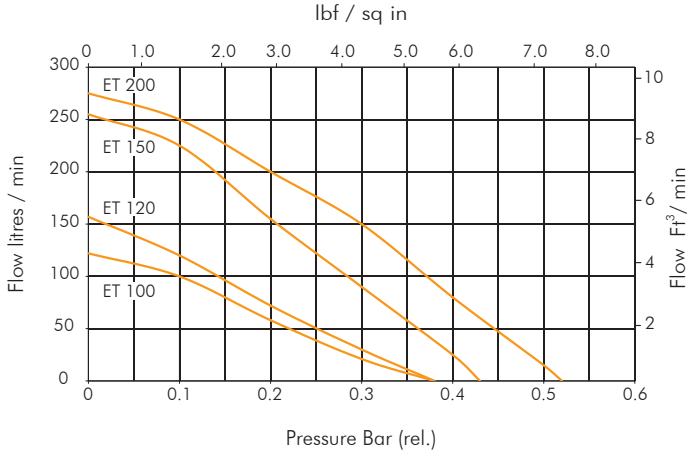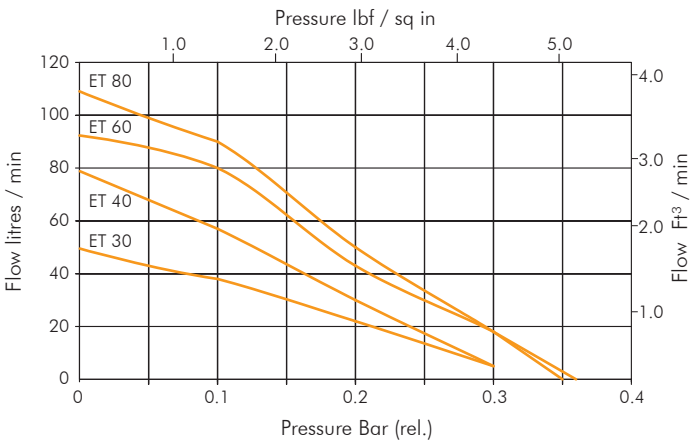


ET SERIES

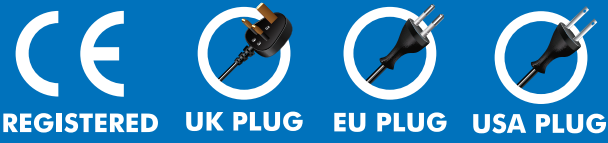


ET30, ET40, ET150 & ET200

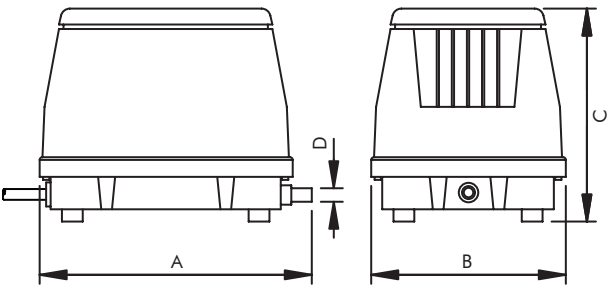

ET60, ET80, ET100, ET120, ET300

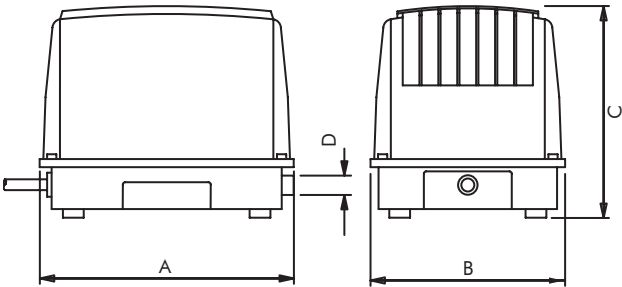

| Model no. | Weight kg | Dimensions mm | | | |
|-----------|-----------|---------------|-----|-----|----|
| | | A | B | C | D |
| ET30 | 4.0 | 208 | 150 | 178 | 14 |
| ET40 | 4.3 | 218 | 156 | 182 | 14 |
| ET60 | 6.0 | 203 | 165 | 153 | 18 |
| ET80 | 7.0 | 210 | 185 | 171 | 18 |
| ET100 | 8.5 | 238 | 196 | 177 | 18 |
| ET120 | 9.5 | 265 | 215 | 198 | 18 |
| ET150 | 9.0 | 256 | 200 | 222 | 18 |
| ET200 | 9.0 | 256 | 200 | 222 | 18 |

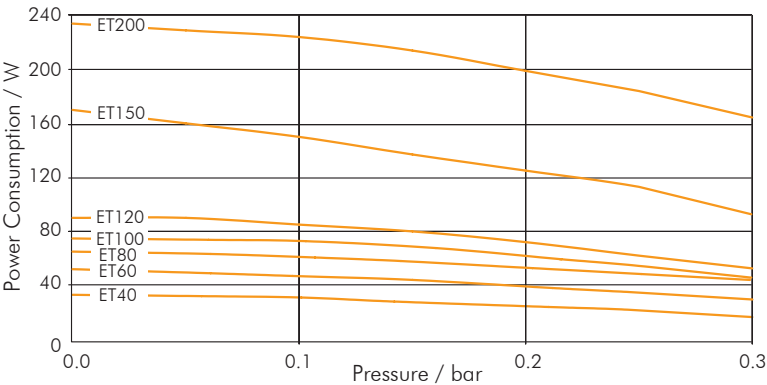

SERVICE KITS

| Model no. | Included in Service Kit | | |
|-----------|-------------------------|--------|----------|
| | Diaphragm | Filter | Other |
| ET30-120 | 2 | 1 | 1 magnet |
| ET150-200 | 2 | 1 | 8 valves |

CONNECTIONS

ET40 - Plain, horizontal, connection 14.0mm OD also supplied with screw in barbed connector 10.0mm OD

ET60, ET80, ET100, ET120, ET150, ET200 - Plain, horizontal, connection 18.0mm OD also supplied with screw in barbed connector 12.0mm OD

ACCESSORIES

Elbow connector (included) 

Large brass barbed connector 18.0mm and 20.0mm (optional) 

At Charles Austen we recommend enviro® pumps are serviced every 18 months, service kits for each pump can be purchased from us. Sign up to our service reminder and we'll remind you when it is due!



Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application.

For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.